



ICECOOL

Top of the line nano-ceramic for crystal-clear visibility and uninterrupted communication.

ICECOOL Series - Engineered with the finest inorganic nano-ceramic material and advanced nano-dispersion grinding technology, this line offers maximum heat-rejection, UV blockage and optical stability. Non-metal construction means zero signal interruption and seamless communication when you step into your car. 70% and 80% VLT options also available for nearly invisible windshield protection.

- Structure** : 3 Layer Advanced co-extrusion Nano-Ceramic
- P.E.T. Type** : Super Optical Clear P.E.T.
- Adhesive** : Acrylic Pressure Sensitive (APS)
- Thickness** : 2 mil Thickness
- Warranty** : **Lifetime*** against peeling, bubbling, cracking, delamination, adhesion failure, discoloration & oxidation.

*original owner

IRR
38-55

UV
90-99

VLT
99.5%

VLR
7-8

TSER
39-71

Thickness
2 MIL

Warranty
LIFETIME

ICECOOL



ICE05

% Visible Light Transmittance	5
% Visible Light Reflectance (Int.)	7
% Infrared Rejection (780nm - 2200nm)	93
% Ultra-Violet Rejected	99.5
% Total Solar Energy Rejected	71



ICE15

% Visible Light Transmittance	15
% Visible Light Reflectance (Int.)	7
% Infrared Rejection (780nm - 2200nm)	99
% Ultra-Violet Rejected	99.5
% Total Solar Energy Rejected	66



ICE20

% Visible Light Transmittance	20
% Visible Light Reflectance (Int.)	7
% Infrared Rejection (780nm - 2200nm)	95
% Ultra-Violet Rejected	99.5
% Total Solar Energy Rejected	64




ICE35

% Visible Light Transmittance	35
% Visible Light Reflectance (Int.)	7
% Infrared Rejection (780nm - 2200nm)	99
% Ultra-Violet Rejected	99.5
% Total Solar Energy Rejected	58



ICE50

% Visible Light Transmittance	50
% Visible Light Reflectance (Int.)	7
% Infrared Rejection (780nm - 2200nm)	98
% Ultra-Violet Rejected	99.5
% Total Solar Energy Rejected	53

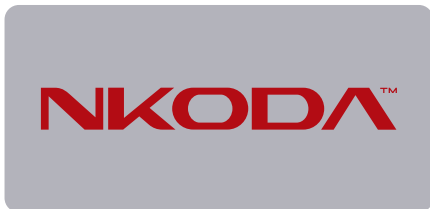

ICE-XT700

% Visible Light Transmittance	73
% Visible Light Reflectance (Int.)	8
% Infrared Rejection (780nm - 2200nm)	96
% Ultra-Violet Rejected	99.5
% Total Solar Energy Rejected	43



ICE-XT800

% Visible Light Transmittance	80
% Visible Light Reflectance (Int.)	8
% Infrared Rejection (780nm - 2200nm)	90
% Ultra-Violet Rejected	99.5
% Total Solar Energy Rejected	39