



SCHELLEVIS®



PRODUCT SPECIFICATIONS

SCHELLEVIS® SLABS

Schellevis® slabs are recognisable at a glance, from their distinctive, open structure. The typical traditional Dutch appearance is visible both on the side and the top. Combining the best of natural raw materials and colouring agents with a special production process and Dutch craftsmanship gives the slabs their unique and timeless character.

Schellevis® slabs are available in a variety of sizes, thicknesses and colours. The entire Schellevis® range has the same appearance. Thanks to this unique characteristic, the slabs can be perfectly combined with other products from the range. Schellevis® slabs feel right at home in a number of places: around the outside of the house, on the roof and in public outdoor spaces.

GUIDED BY NATURE

We believe it's important that an outdoor space is well-balanced and exudes tranquillity. Because in a living environment like that, you can relax; you're in your element, enjoying it. Whether alone or together with others. The outdoor space is the Schellevis® domain and nature is a major source of inspiration. We connect architecture with nature, with respect for the environment. That's how we contribute to a sustainable, natural experience of the outdoor space

PRODUCT SPECIFICATIONS SCHELLEVIS® SLABS

LxBxH in mm	Kg	Safe load in a sand bed (kg)*	Safe load on 4 corners (kg)**	# slabs per m2	# slabs per pallet	Pallet size in mm	Colours	Can be used for
200x200x50	4	300	-	25	250	1000x1000		
200x200x70	6	550	-	25	200	1000x1000		
400x400x50	17	3.000	900	6,25	60	1200x800		
400x400x70	25	4.500	1.700	6,25	48	1200x800		
500x500x50	27	2.500	750	4	40	1000x1000		
500x500x70	39	4.500	1.400	4	32	1000x1000		
600x400x50	26	1.900	600	4,17	40	1200x800		
600x400x70	37	2.200	1.000	4,17	32	1200x800		
600x600x50	39	1.900	550	2,78	20	1200x600		
600x600x70	55	2.200	1.100	2,78	16	1200x600		

* Safe load permitted per tile in a sand bed of > 200 mm and a wheel surface area of 250x250 mm

** Safe load permitted per tile laid on 4 corners. Minimum size bearing block 30x30x4 mm and wheel surface area of 250x250 mm

Product features

- Unique Schellevis® structure and appearance
- Products taper (1.5 mm each side)
- No bevel
- Durable due to the use of natural raw materials and colouring agents
- Non-slip
- Resistant to frost and road salt
- Country of origin: The Netherlands
- Material type: Concrete

Technical features



- Dimensional stability (L/B):
≤ 600 mm: ± 2 mm, (D) ± 3 mm
- Dimensional stability – diagonal:
≤ 850 mm: ≤ 3 mm
- Flexural strength: ≥ 5,0 N/mm²
- Wear resistance: ≤ 23
- Environmental class: XF4
- Slip resistance: R13
- Reaction to fire: NPD
- Weather resistance (frost/thaw): 0,2 kg/m²

Processing instructions

- Both the top and side can be placed in sight since both are provided with the characteristic Schellevis® structure.
- Use joint of at least 5 mm when placing the products. The larger the product, the broader the joint (maximum 10 mm).
- Lay the products on a bed that is stable, level and draining. That way, the products will be well anchored and you will prevent subsidence.
- Don't use a vibrating compacter but use a rubber mallet instead.
- There may be a natural variation in structure or colour in each batch. This variation is due to the production process and is part and parcel of the natural character of the product.
- It's therefore advisable to mix the products from several pallets when processing.

Schellevis® quality

- Tested according to European standards: EN 1339
- NL BSB certificate K20627
- CE certificate and DoP 530
- CSC mark (Concrete Sustainability Council)
- NL Greenlabel

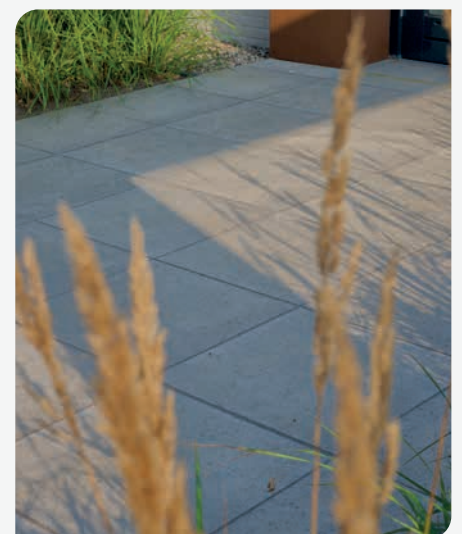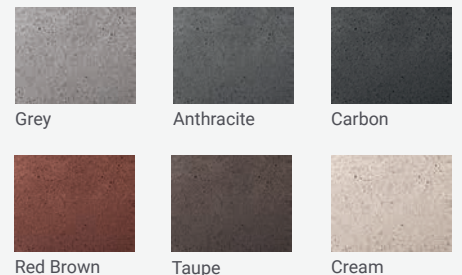

SCHELLEVIS®