




Create your own wae


Shape

Cityscape

66 x 51 x 7 = (8 tiles per m²)

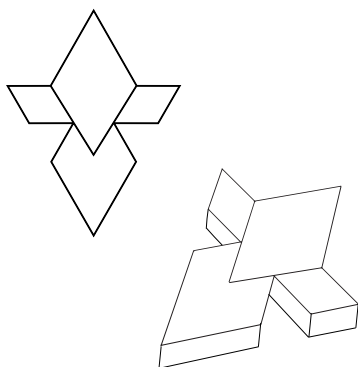


Open structure (air bubbles) =
the top surface

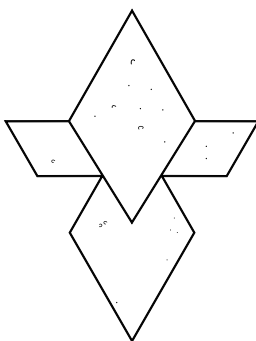


Paving

Do NOT use a plate compactor on the tiles. Instead, tap them into place using only a rubber mallet.

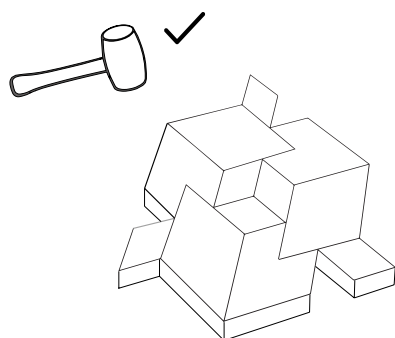


When laying the tiles, DO NOT
slide the tiles on each other.

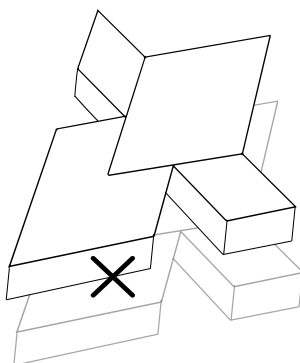


Installation

The tiles should be laid next to each other in this manner. The tiles are not dimensionally stable, so leave a distance width for the grout of approximately 8 mm between them.

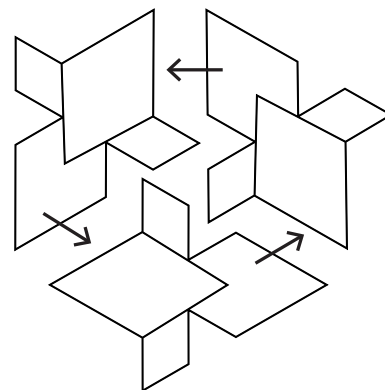


Watch out for cement residue

When cutting or grinding paving stones to fit or customize them, do not perform these operations on the paving stones themselves, due to the concrete film.

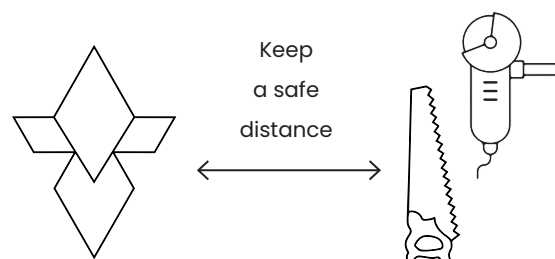

Create your own Wae

Expand the design and go for the ultimate “Escher” effect! Create a playful look by, for example, mixing and matching different colors. We have reddish-brown, anthracite, and gray in our collection.

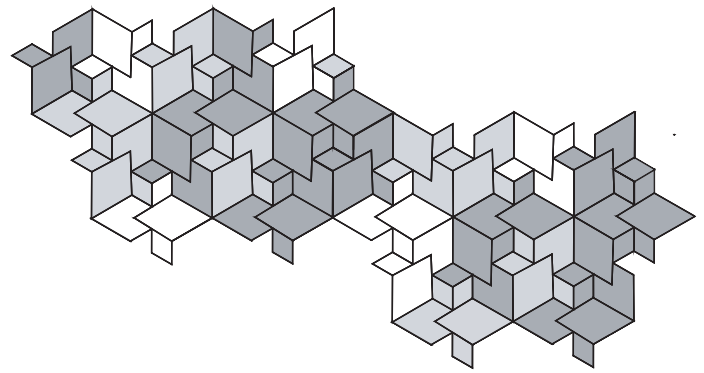

Installation & Maintenance Guide

A suitable subbase forms the foundation for laying the tiles. The correct approach depends on the type of soil, such as clay or sand. We recommend having the subbase assessed and prepared by an experienced professional. Always ensure a well-compacted sand bed with a slope of 1–2%. A carefully prepared sand bed is the foundation for years of enjoyment of beautiful paving.

Tile installation

- We recommend having the tiles installed by experienced professionals.
- Do not use a plate compactor on the tiles. Instead, tap them into place using only a rubber mallet.
- Never cut or grind the tiles above or directly on the paved surface. This can cause cement residue to form on the surface. Always carry out cutting work at a safe distance and keep the tiles wet while cutting. Rinse the cut tiles immediately before installation.
- Do not slide the tiles over one another during installation. Scratches are difficult or impossible to remove.

Grouting

We recommend using a hard-setting, water-permeable jointing compound. This helps limit weed growth and allows the graphic pattern of the paving to stand out at its best. Various suitable jointing compounds are available. Always read the installation instructions for the selected jointing compound carefully. Studio Wae does not provide technical advice on the application of these products.

Cleaning

- Do not leave potting soil, contaminated sand, or cement on the tiles. Remove any residue immediately with clean water and a soft brush.
- Do not leave dirt or leaves on the tiles for extended periods, as this may cause staining.
- Clean the tiles with clean water and Bionyx when necessary.
- Do not use chemical or synthetic cleaning products.
- Do not use a pressure washer, as this may roughen the tile surface.

White Efflorescence

“The Cityscape” is a concrete tile. Concrete is made from natural materials such as sand, gravel, cement, and water. As a result, white efflorescence may occasionally appear on the surface of the tile. Efflorescence is a natural characteristic of concrete and does not affect the quality or lifespan of the tile. In most cases, the efflorescence will disappear naturally over time due to rain, normal use, and exposure to the elements. Do not treat the tiles with acids or harsh cleaning products, as this may damage the surface.

Please note: White efflorescence is not grounds for rejecting our concrete products.

Naturally Occurring Iron Staining

Our concrete products are made from circular raw materials. These raw materials may contain natural iron particles or iron compounds. As a result, small rust-coloured spots or discolouration may occasionally appear on the surface of the tile. This discolouration does not affect the quality, strength, or lifespan of the tile. Rust discolouration caused by naturally occurring components is an inherent characteristic of products made from circular raw materials and is not considered a product defect or quality issue.

Damage upon delivery

Despite our greatest care, materials may occasionally be damaged during transport. Therefore, always inspect the packaging and pallets for visible damage upon delivery. If any tiles are broken or not delivered in good condition, do not install them. Instead, contact us immediately. Take clear photographs of the damage, preferably while the tiles are still on the pallet. Broken tiles or tiles with cracks will be replaced free of charge. Any additional costs for installing, removing, or reinstalling the tiles will not be reimbursed. Once the tiles have been installed, we are no longer able to assess or compensate for damage to the delivered tiles.